

Kria KR260 Robotics Starter Kit

OVERVIEW

The Kria™ KR260 Robotics Starter Kit is a Kria SOM-based development platform for robotics and factory automation applications. It enables roboticists and industrial developers without FPGA expertise to develop hardware accelerated applications for robotics, machine vision, and industrial communication & control. Developers benefit with greater flexibility from native ROS 2 and Ubuntu support along with increased productivity through the Kria Robotics Stack (KRS).

The pre-built interfaces and accelerated applications make the KR260 an ideal platform to accelerate robotics innovation and take those ideas to volume production deployment with commercial- and industrial-grade Kria K26 SOMs.

HIGHLIGHTS

Instant-On Robotics Platform

- > Enables software-defined, hardware-accelerated applications for robotics
- > Provides deterministic communication across robotics internal network
- > Integrates any sensor (e.g., vision, radar, LiDAR) for perception
- > Leverages Modbus over Pmod for actuation

Time Sensitive Networking

- > Accurate time synchronization over Ethernet (IEEE Std 802.1AS)
- > Two TSN ports with built-in switch eliminates external TSN switch
- > Ethernet with support for converged traffic classes and data types

High-Performance Machine Vision

- > SLVS-EC sensor RX connector for high-performance vision
- > SFP+ cage (10G) for 10GigE Vision
- > Partner IP available for sensor and network connectivity
- > Lightweight ISP optimized for low latency with Vitis™ Vision libraries







TARGET APPLICATIONS

Robotics

- > Collaborative Robots
- > Surgical Robots
- > Autonomous Mobile Robots (AMRs)
- > Automated Guided Vehicles (AGVs)
- > Aerial Robots
- > Delivery Robots
- > Cartesian Robots
- > Hospitality Robots


Industrial Communcation & Control

- > Programmable Logic Controllers (PLC)
- > Programmable Automation Controllers (PAC)
- > Computer Numerical Control Router (CNC)
- > Wired/Wireless Secure Industrial Gateway

Machine Vision

- > SLVS-EC Sensor-Based Camera
- > USB-Stereo Camera
- > 1/10GigE Vision / CXP over Fiber

Kria KR260 Robotics Starter Kit

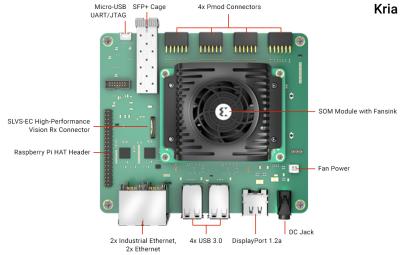

PARAMETER	KR260 STARTER KIT
Device	Zynq® UltraScale+™ MPSoC EV (XCK26)
Form factor	SOM + Carrier Card + Thermal Solution
Starter kit dimensions	119mm x 140mm x 36mm
Thermal cooling solution	Active (Fan + Heatsink)
System logic cells	256K
Block RAM blocks	144
UltraRAM blocks	64
DSP slices	1.2K
Ethernet interfaces	4x 10/100/1000 Mb/s RJ-45s 1x SFP+ Cage
DDR memory	4GB (4 x 512Mb x 16 bit) [non-ECC] DDR4
Primary boot memory	512Mb QSPI
Secondary boot memory	SDHC card
Device security	Zynq UltraScale+ MPSoC hardware root of trust (RoT) in support of secure boot. Infineon TPM 2.0 in support of measured boot.
Video	x1 SLVS-EC Gen2 x2 lane interface DisplayPort 1.2a Output for 1920 x 1080 at 60Hz
I/O expansion	x4 Pmod 12-pin interface x1 Raspberry Pi HAT header with 26 I/Os
USB3.0/2.0 interfaces	x4

TAKE THE NEXT STEP

For more information about the Kria KR260 Robotics Starter Kit, visit www.xilinx.com/kr260

Corporate Headquarters

Xilinx, Inc. 2100 Logic Drive San Jose, CA 95124 USA Tel: 408-559-7778

Tel: 408-559-7778 www.xilinx.com Xilinx Europe
Xilinx Europe
Bianconi Avenue
Citywest Business Campus
Saggart, County Dublin
Ireland
Tel: +353-1-464-0311
www.xilinx.com

Japan

Xilinx K.K. Art Village Osaki Central Tower 4F 1-2-2 Osaki, Shinagawa-ku Tokyo 141-0032 Japan Tel: +81-3-6744-7777 japan.xilinx.com Asia Pacific Pte. Ltd.

Xilinx, Asia Pacific 5 Changi Business Park Singapore 486040 Tel: +65-6407-3000 www.xilinx.com India

Xilinx India Technology Services Pvt. Ltd. Block A, B, C, 8th & 13th floors, Meenakshi Tech Park, Survey No. 39 Gachibowli(V), Seri Lingampally (M), Hyderabad -500 084 Tel: +91-40-6721-4747 www.xilinx.com



© Copyright 2022 Advanced Micro Devices, Inc. All rights reserved. Xillnx, the Xillnx logo, AMD, the AMD Arrow logo, Alveo, Artix, Kintex, Kria, Spartan, Versal, Vitis, Virtex, Vivado, Zynq, and other designated brands included herein are trademarks of Advanced Micro Devices, Inc. Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies. AMBA, AMBA Designer, ARM, ARM1176JZ-S, CoreSight, Cortex, and PrimeCell are trademarks of ARM in the EU and other countries. PCle, and PCl Express are trademarks of PCl-SIG and used under license.

Printed in the U.S.A. AC04-21-22