

Versal AI Edge Series

- 4X Al Performance/Watt vs. GPUs¹
- Accelerates the Whole Application with the Highest Levels of Safety & Security
- > World's Most Scalable and Adaptable Portfolio from Edge to Endpoint

OVERVIEW

The Versal® AI Edge series delivers 4X AI performance/watt vs. leading GPUs for intelligence in automated driving, predictive factory and healthcare systems, multimission payloads in aerospace & defense, and a breadth of other applications. More than just AI, the Versal AI Edge series accelerates the whole application from sensor to AI to real-time control, all with the highest levels of safety and security to meet the stringent functional safety requirements in IEC 61508 and ISO 26262, among others.

As an adaptive compute acceleration platform (ACAP), the Versal AI Edge series allows developers to rapidly evolve their sensor fusion and AI algorithms while leveraging the world's most scalable device portfolio for diverse performance and power profiles from edge to endpoint.

HIGHLIGHTS

Architectural Innovation for Breakthrough AI Performance/Watt

- > Optimized AI Engines-ML deliver 4X performance/watt vs. GPUs
- > Native support for diverse ML data types: INT8, INT4, BFLOAT16
- > 4MB on-chip accelerator RAM extends memory hierarchy for AI performance

Accelerates the Whole Application w/the Highest Levels of Safety & Security

- > Programmable I/O to integrate any sensor, any interface
- > Adaptable Engines for sensor fusion and pre-processing
- > Intelligent Engines for AI, vision processing, and radar & LiDAR processing
- > Scalar Engines for embedded compute and real-time control
- > Architected to meet IEC 61508 and ISO 26262 safety standards

World's Most Scalable and Adaptable Portfolio from Edge to Endpoint

- > Broadest device selection to scale from edge sensor to CPU accelerator
- > Design once and scale with same architecture, tools, and certifications
- > Scale for varying levels of compute safety & security targets
- > Hardware adaptable for custom AI, vision, and sensor strategies







TARGET APPLICATIONS

ADAS and Automated Drive

- > Edge Sensor (e.g., radar, LiDAR, vision)
- > Domain Controllers
- > CPU Accelerator

Computer Vision

- > Edge Al Box
- > Machine Vision Camera
- > Security Camera

Industrial

- > Collaborative Robotics
- > Converged Networking
- > Industrial-Grade PC

Medical

- > Ultrasound
- > Endoscopy
- > CT Scanner
- > Surgical Robotic Systems


Aerospace and Defense

- > Unmanned Aerial Vehicles
- > MILCOM Radio

FEATURES

FEATURES OVERVIEW	
Scalar Engines	 Up to 1.7GHz dual-core Arm® Cortex®-A72 application processor for Linux-class operating systems Up to 750MHz dual-core Arm Cortex-R5F real-time processor with low latency and determinism Embedded compute for complex algorithms and highest levels of functional safety (ASIL & SIL) Platform management for quick boot, power & thermal management, and safety & security enclave
Adaptable Engines	 Scalable and adaptable sensor fusion for any combination of sensor or data types Adaptable for any workload, including deterministic networking, motor control, and signal conditioning Capable of over-the-air hardware updates to instantly update Al acceleration, sensor fusion algorithms, and more Dynamic Function Exchange (DFx) to swap functionality in milliseconds, reducing device cost and system power
Intelligent Engines	 Al Engines-ML (AIE-MLs) for low power and low latency inference, with native support for INT8, INT4, BFLOAT16 C-programmable for software developers and library-base design for data scientists DSP Engines for diverse workloads including image signal processing, support for single-and half-precision floating point
Safety and Security	 Built to meet stringent safety and security standards including IEC 61508 and ISO 26262 Security processing subsystem includes cryptographic acceleration, key management, and anti-tamper Safety measures across the platform, including triple redundant platform management, system monitoring, and ECC
Accelerator RAM	 4MB of on-chip memory for high bandwidth memory access from any engine Optimizes AI performance by reducing the need for external memory Extends the platform's adaptable memory hierarchy to optimize for system performance
Programmable I/O	 Hardened memory controller for DDR4-3200 and LPDDR4-4200 Configure the same I/O for any sensor, network connectivity, or DDR interface Native MIPI support to handle up to 8- megapixel resolutions and beyond—critical to Level-2 ADAS and above

World's Most Scalable Edge AI Platform

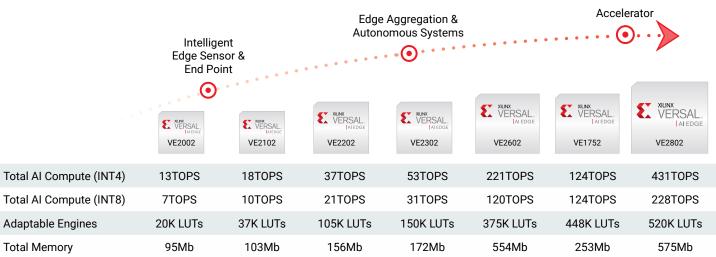

TAKE THE NEXT STEP

For more information about the Xilinx® Versal AI Edge series, visit https://www.xilinx.com/versal-ai-edge.

Corporate Headquarters

Xilinx, Inc. 2100 Logic Drive San Jose, CA 95124 USA Tel: 408-559-7778 www.xilinx.com Xilinx Europe
Xilinx Europe
Bianconi Avenue
Citywest Business Campus
Saggart, County Dublin
Ireland
Tel: +353-1-464-0311

Japan Xilinx K.K.

Allilix N.N. Art Village Osaki Central Tower 4F 1-2-2 Osaki, Shinagawa-ku Tokyo 141-0032 Japan Tel: +81-3-6744-7777 japan.xilinx.com Asia Pacific Pte. Ltd.

Xilinx, Asia Pacific 5 Changi Business Park Singapore 486040 Tel: +65-6407-3000 www.xilinx.com India

Xilinx India Technology Services Pvt. Ltd. Block A, B, C, 8th & 13th floors, Meenakshi Tech Park, Survey No. 39 Gachibowli(V), Seri Lingampally (M), Hyderabad -500 084 Tel: +91-40-6721-4747 www.xilinx.com

