

## XQR Space-Grade Kintex UltraScale and Space Heritage

### XILINX - THE ADAPTABLE INTELLIGENT COMPANY

Building on 20+ Years of Heritage.

From satellites to deep-space exploration, space missions must succeed in the most severe environments. Today, the worldwide trend for space electronics is having the capability for on-board processing also known as OBP, this allows systems to update in real time (eg. as protocols change the need to update algorithms becomes key). OBP has the potential to bring video on-demand, capacity growth, and convergence of ground and space networks. Traditionally, signal processing in space has been performed by Application Specific Integrated Circuits (ASIC) which are hardwired and not reconfigurable. Today protocols and applications can change rapidly and to keep up with the ever changing needs there is only one possible solution – a true on-orbit reconfiguration with Xilinx FPGAs.

Xilinx space-grade products are leading the aerospace industry to a new era of re-programmability and performance. The portfolio of rad-hard and rad-tolerant re-configurable FPGAs and configuration memories provide unmatched reliability, flexibility, density, and system level architectures that enable unparalleled design cycle and cost benefits for space systems.

Xilinx supports the broadest set of sub-segments and applications, covering ground-to-air-to-space applications. Xilinx rad-hard and rad-tolerant reconfigurable FPGAs give designers robust, qualified devices that can meet the performance, reliability, and lifecycle demands of space. Supported by Xilinx targeted design platforms, these programmable solutions deliver the Xilinx trademark value: shorter design times, lower costs, and greater flexibility compared to traditional implementations.

### THE XILINX DIFFERENCE IN SPACE

- > Only On-Orbit Reconfigurable FPGA Solution
- > Low Power Screened Devices
- > Heritage with Multiple Successful Space Programs
- > Footprint Compatible with Commercial Devices
- > Support and Participation in the Xilinx Radiation Test Consortium (XRTC)
- > Partner Investments for Kits & Solutions
- > A&D Roadmap to New Solutions (RFSoc, Ruggedized, XQR)

Xilinx rad-hard and rad-tolerant FPGAs are robust— designed, packaged and space-grade qualified to meeting the performance, reliability and lifecycle demands of extreme environments, while enabling shorter design times, lower cost, lower program risk and greater flexibility than feasible with traditional ASIC implementations.



### XILINX IN SPACE

- > Iridium Next
- > Glonass-K
- > NovaSAR
- > Europa Clipper
- > NISAR
- > Europa Mission

### XQR ARCHITECTURE PORTFOLIO

- > XQR Kintex UltraScale
- > XQR Virtex 5 FPGA
- > XQR Virtex 4 FPGA
- > Rad Hard PROMs

## THE ADAPTABLE ADVANTAGE

## XQR Space-Grade Kintex UltraScale and Space Heritage

A&D contractors and government agencies, faced with several global economic shifts, are under more pressure than ever to create increasingly complex electronics systems. The Xilinx Targeted Design Platforms for A&D accelerates system development, for short cycles and lower costs, and gives developers full access to the flexibility and power of programmable devices. The V4QV product offers 4 different devices with a mix of DSP, BRAM, and logic cell counts from the DSP rich SX55 to the memory rich FX140 or the logic cell rich LX200. The V5QV device offers a great balance of DSP, memory, and logic resources while adding the PLLs and MGT transceivers in a 45x45mm CN1752 package.

## RT KINTEX ULTRASCALE FIRST 20NM FPGA FOR SPACE APPLICATIONS

### > Adaptive Computing for Ultra High Throughput, High Bandwidth Applications

- True Unlimited On-Orbit Reconfigurable Solution
- 10X DSP Compute capability for High Performance Applications
- Full Radiation Tolerance across All Orbits
- Machine Learning Suite for real time on-board-processing

### > Next Generation Space-Grade Kintex UltraScale Platform


- Xilinx UltraScale features innovative design for SEU mitigation (> 40 patents)
- Deploys same commercial silicon mask set
- Utilizes Vivado UltraFast Development Advantage

### > Kintex UltraScale in Ruggedized 1509 Ceramic Column Grid Array (CCGA)

- 45mm x 45mm package
- Footprint compatible with commercial A1517 package
- Military Temperature Grade & -1 Speed Grade

### > Product Space Test Flows

- B-Flow (QML-Q Equivalent) & Y-Flow (QML-Y Compliant)
- Per MIL-PRF-38535 Revision K for ceramic non-hermetic packages in space applications, designated as Class Y

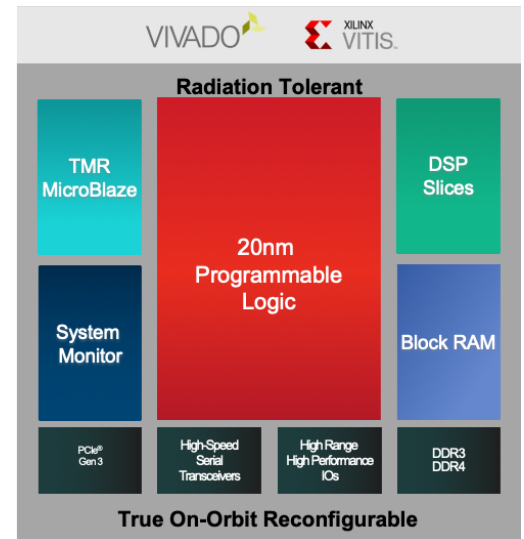

## XILINX'S FIRST ON-ORBIT ADAPTIVE V5QV FPGA

- > Major Flight Heritage Since 2014 with the Iridium NEXT
- > Radiation hardness built into silicon (RHBD)
- > Dynamically adaptable digital logic FPGA for space environment processing needs
- > Silicon functionality, IPs, radiation, reliability, tool chains all validated through extensive qualification tests and user testing
- > QML-Y certification in process
- > Lifecycle extended to 2030s

## SPACE GRADE VIRTEX-4QV FPGA

- > V-Flow = QML-V Equivalent
- > Identical to commercial silicon (same mask, same design)
- > Latchup Immune
- > Fabricated with EPI wafer for Latchup Immunity
- > TID characterized, monitored & guaranteed
- > SEU characterized
- > Ceramic packaging

## XQR Space-Grade Kintex UltraScale and Space Heritage

	XQR4V (RADIATION TOLERANT, 1.2V)				XQR5V (RH-BD, 1.0V)		RT KINTEX ULTRASCALE (RADIATION TOLERANT, 1.01V)		
	SX55	FX60	F140	LX200	FX130				
Logic Cells	55,296	56,880	142,128	200,448	131,072		726,000		
CLB Flip-Flops	49,152	50,560	126,336	178,176	81,920		663,360		
Distributed RAM (Kbits)	384	395	987	1,392	1,580		9,180		
Total Block RAM (Kbits)	5,760	4,176	9,936	6,048	10,728		38Mb		
Max Distributed RAM (Kb)	--	--	--	--	--		9,180		
Block RAM/FIFO w/ECC (36kb each)	--	--	--	--	--		1,080		
Digital Clock Manager (DCM)	8	12	20	12	12		--		
Phase Lock Loop (PLL)	--	--	--	--	6		12 CMT (1 MMCM, 2 PPLs)		
DSP Slices	512	128	192	96	320		2,760		
System Monitor	--	--	--	--	--		1		
PCI <sup>®</sup> e Gen1/2/3	--	--	--	--	--		3		
350 MHz PPC405 Cores	--	2	2	--	--		--		
10/100/1000 EMACs	--	4	4	--	6		--		
Multi-Gigabit Transceivers (MGT)	--	--	--	--	18 @ 4.25Gbps		32 @ 12.5Gbps		
TID (krad)	300	300	300	300	1,000		100		
SEL Immunity (LETs)	>125	>125	>125	>125	>125		>80MeV		
	Radiation Tolerant (RT)				Radiation Hardened by Design (RHBD)		Radiation Tolerant (RT)		
Test Flows	V-Flow (QML-V Equivalent)				B-Flow (QML-Q Equivalent) V-Flow (QML-V Equivalent)		B-Flow (QML-Q Equivalent) Y-Flow (QML-Y Compliant)		
Package	Size (mm)	35 x 35 mm		40 x 40 mm		45 x 45 mm		40 x 40 mm	
	Pin Counts	1140	1144	1509		1752		1509	
	Max. IO Count	640	576	768	960	840		620	
	Daisy Chain	Yes	Yes	Yes		Yes		Yes	

### Corporate Headquarters

Xilinx, Inc.  
2100 Logic Drive  
San Jose, CA 95124  
USA  
Tel: 408-559-7778  
www.xilinx.com

### Xilinx Europe

Xilinx Europe  
Bianconi Avenue  
Citywest Business Campus  
Saggart, County Dublin  
Ireland  
Tel: +353-1-464-0311  
www.xilinx.com

### Japan

Xilinx K.K.  
Art Village Osaki Central Tower 4F  
1-2-2 Osaki, Shinagawa-ku  
Tokyo 141-0032 Japan  
Tel: +81-3-6744-7777  
japan.xilinx.com

### Asia Pacific Pte. Ltd.

Xilinx, Asia Pacific  
5 Changi Business Park  
Singapore 486040  
Tel: +65-6407-3000  
www.xilinx.com

### India

Xilinx India Technology Services Pvt. Ltd.  
Block A, B, C, 8th & 13th floors,  
Meenakshi Tech Park, Survey No. 39  
Gachibowli(V), Seri Lingampally (M),  
Hyderabad -500 084  
Tel: +91-40-6721-4747  
www.xilinx.com

